

rotronic

Datenblatt - Fiche technique - Data sheet


11.99.8909




VALUE USB 2.0 Kabel, Typ A-A, 0,8m

VALUE Câble USB 2.0 Type A-A, 0,8m

VALUE USB 2.0 Cable, Type A-A, 0.8 m

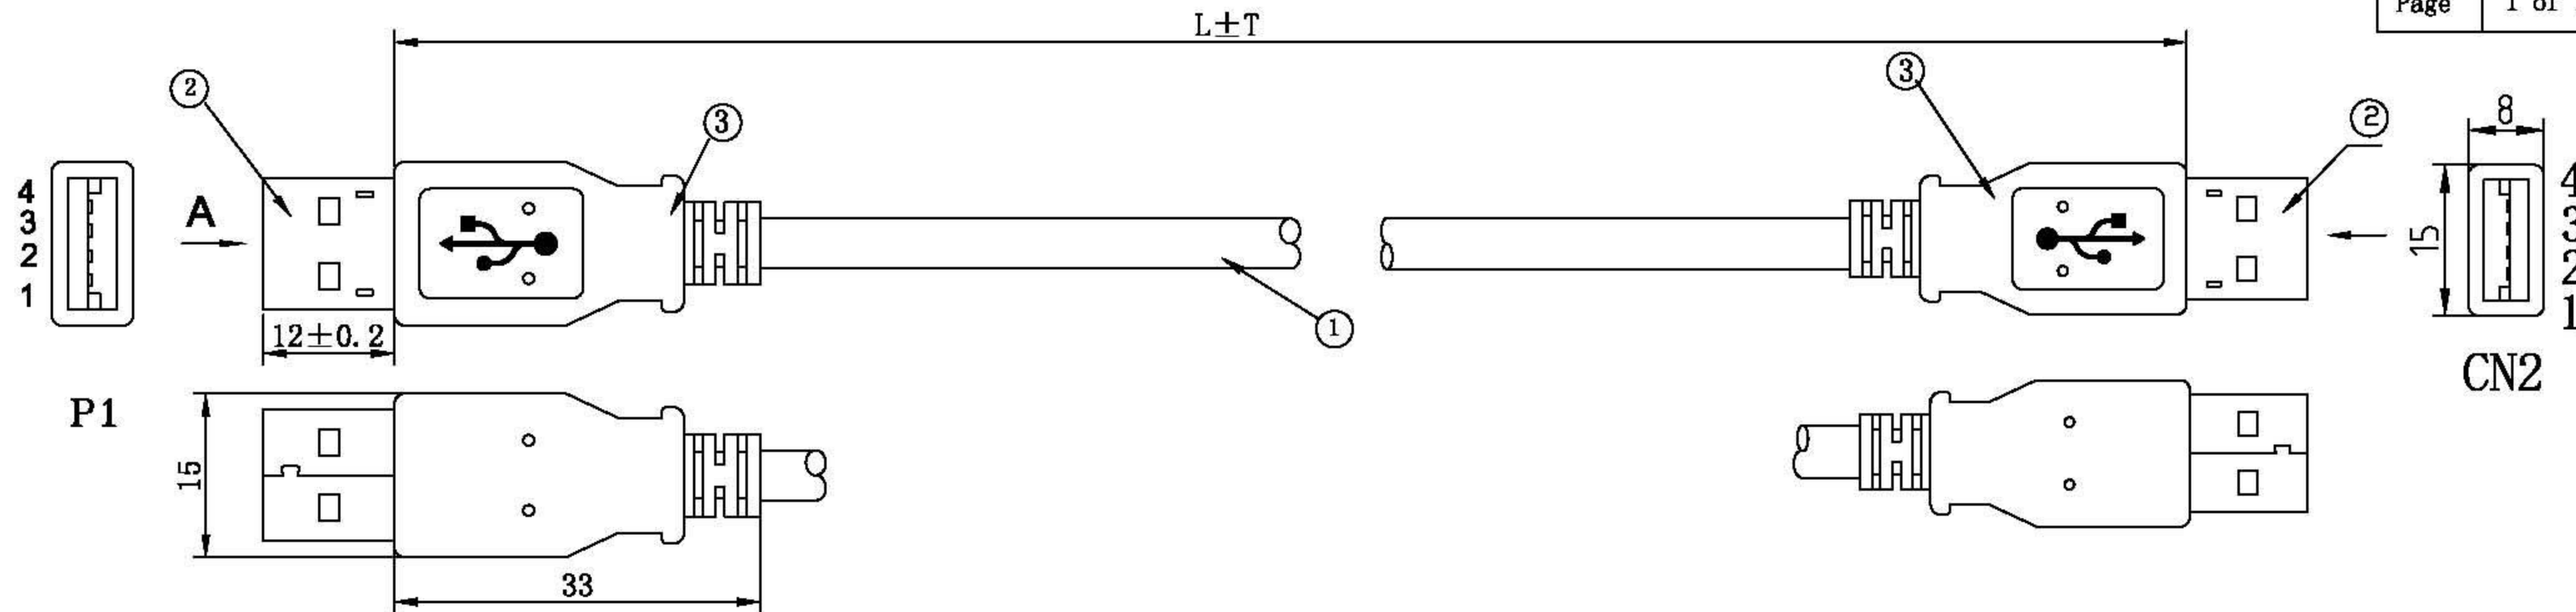

PIN OUT

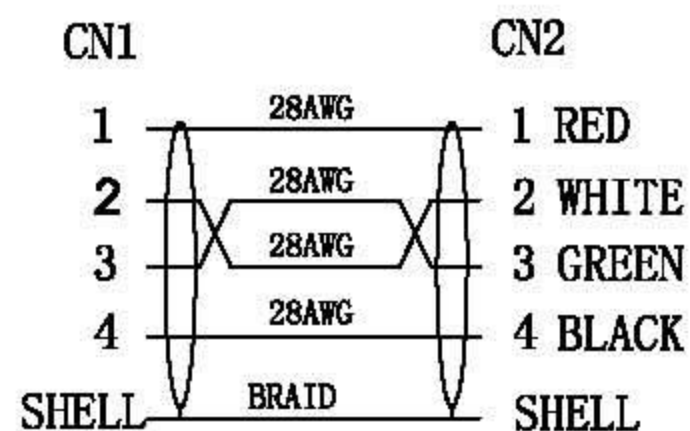

NOTE 1:

ITEM NO.	LENGTH
11. 99. 8909R	800 ± 20mm
11. 99. 8919R	1800 ± 30mm
11. 99. 8931R	3000 ± 50mm
11. 99. 8944R	4500 ± 100mm

NOTE:

- Electrical test:
 - 100% open short & miss wire test;
 - Insulation resistance:DC 300V 10M Ω ;
 - Contact resistance:3 Ω Max;
 - Dielectric strength:100V AC/Minute, 1mA.
 - RoHS compliant
 - PRINTING:USB 2.0 CABLE, 28AWG×1P+28AWG×2C
 - Packing: 1PCS/PE BAG + LABEL 100PCS/CARTON
11. 99. 8909 50PCS/CARTON

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
③	OUTER MOLD	Shore 88A PVC(UL94V-2) Color: White	2	
②	USB A TYPE	USB A /M Type, The Pin Gold Plating 30U", the shell for Nickel Plating	2	
①	CABLE	USB 2.0 28AWG(7/0.12BC*1P)+28AWG(7/0.12BC*2C)+AB B=0.12/3*16 AL-MG JACKET:PVC/WHITE (WH11) OD: 3.8±0.2mm	1	

Rotronic Co., Ltd

CUSTOMER	REF.	ITEM NO.	11. 99. 8909	11. 99. 8919
			11. 99. 8931	11. 99. 8944
PRODUCT NAME	USB 2.0 AM/AM	DRAW NO.	UNTT	MM
DRAWNBY	CHECKBY	APPOBY	DATE	
chenhuan	chenhuan		2009-11-20	

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2009-11-20	A